



Style "IC501" Coupling with Insulating Boot

Material Specifications

Center Rings: Ductile iron per ASTM A 536, Grade 65-45-12. Yellow shopcoat. Epoxy and special coatings available on request.

End Rings: Ductile iron per ASTM A 536, Grade 65-45-12. Color coded RED for O.D. Std. and Std. Std., BLACK for cast iron and YELLOW for A/C.

Gaskets: SBR per ASTM D 2000 MBA 710, compounded for water and sewer service. Other compounds available on request.


Bolts and Nuts: 5/8" high strength, low alloy steel trackhead bolts. N.C. roll thread and heavy hex nuts, corrosion-resistant steel. Steel meets AWWA C-111-80 composition specifications. Other materials or special coatings available on request.

Insulating Boot: Ethylene Propylene Diene Methylene (EPDM) compounded for water and sewer service.

Options: For 14" and larger, see Page 2-22. For other options and specifications, see Page 2-23.

Use: Romac insulating couplings effectively stop electrolytic action by isolating one pipe from the other by means of an insulating boot.

Meets AWWA C219

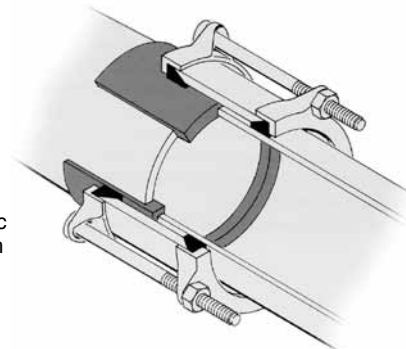

NOMINAL PIPE SIZE	O.D. (inches)	GASKET TO USE FOR IRON PIPE SIZE	GASKET TO USE FOR DUCTILE PIPE SIZE	BOOT ONLY		COMPLETE	
				LIST PRICE	APPROX. WT.	LIST PRICE	APPROX. WT.
4"	4.50	4.80 - 5.00	—	\$26.45	.75 #	\$142.60	17.75 #
	4.80	—	4.74 - 5.10				
6"	6.625	6.90 - 7.10	—	33.71	1.10 #	191.80	26.10 #
	6.90	—	7.15 - 7.35				
8"	8.625	8.60 - 9.06	—	42.93	1.20 #	243.21	33.20 #
	9.05	—	8.99 - 9.40				
10"	10.75	Special ¹	—	67.96	1.75 #	344.30	63.75 #
	11.10	—	10.89 - 11.40				
12"	12.75	Special ¹	—	76.66	2.10 #	409.01	73.10 #
	13.20	—	13.15 - 13.55				
14"	14.00	14.03 - 14.40	—	84.21	2.25 #	660.06	100.25 #

¹ Special, not common stock gaskets. Price on application.

IMPORTANT: Insulating boots add .3" to the O.D. of the pipe, and must be considered when ordering IC501 couplings.

Note: Romac recommends 7 inch long center when booting both pipe ends, contact Romac for price and availability. Contact Romac for other available sizes and applications.

Example: For an insulating coupling to fit 6" D.I., order **IC501-7.35 x 7.10, with boot to fit 6.90** If ordering insulating boot only, specify O.D.




WARNING: Flexible couplings do not provide protection against possible pullout of pipe ends in unrestrained conditions.

Style "702" Compression Coupling

Material Specifications

Body: 69000 PSI steel tubing
Gasket: NBR
Nut: Malleable iron, ASTM A47
Finish: Galvanized

To Order: Specify catalog number.

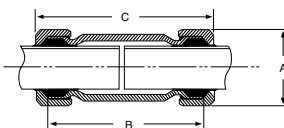

NOM. PIPE SIZE	O.D. (inches)	CATALOG NUMBER	LIST PRICE	CARTON QTY.	APPROX. WEIGHT (lbs.)	OVERALL DIMENSIONS		
						A	B	C
1/2"	0.84	702 - 084	\$25.72	25	.80 #	1.625"	3.75"	4.375"
3/4"	1.05	702 - 105	27.53	25	1 #	1.875"	3.75"	4.375"
1"	1.32	702 - 132	31.74	25	1 #	2.188"	4.125"	4.75"
1 1/4"	1.66	702 - 166	38.95	12	2 #	2.563"	4.50"	5.125"
1 1/2"	1.90	702 - 190	44.21	12	3 #	2.813"	4.688"	5.375"
2"	2.38	702 - 238	55.79	12	3 #	3.313"	5.063"	5.75"



WARNING: Flexible couplings do not provide protection against possible pullout of pipe ends in unrestrained conditions.