

# PIRANHA™



## RESTRAINT GASKET



- 350 PSI.
- SIMPLE INSTALLATION.
- MADE IN THE U.S.A.



**HARDENED  
STAINLESS STEEL  
TEETH INTEGRATED  
INTO THE GASKET  
GRIP AND HOLD  
THE PIPE IN PLACE.**

- **DUAL FUNCTION GASKET.**  
Simultaneously seals and restrains.
- **SIMPLE INSTALLATION.**  
No threaded fasteners to torque.
- **MADE IN THE USA BY ROMAC.**  
Because we create the Piranha™ in our own facilities, we are able to maintain tight tolerances on quality throughout all phases of manufacturing.

## MATERIAL SPECIFICATIONS


**RUBBER** SBR per ASTM D 2000 MBA 710, compounded for water and sewer service. Meets AWWA C111. Other compounds available on request.

**TEETH** Hardened stainless steel vulcanized into the rubber.

**USE** For use only on "Tyton" Ductile Iron Bell & Spigot Push-On Joints. Not for use on PVC pipe.

**WORKING PRESSURE** 350 PSI (not to exceed pipe rating).

## ASSEMBLED JOINT

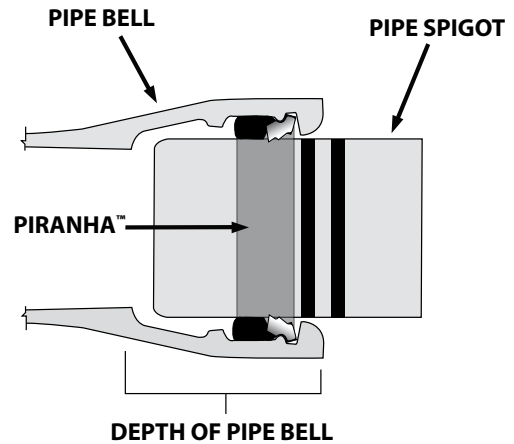

NOM. PIPE SIZE	CATALOG NUMBER	PIPE OD	DEPTH OF BELL	MAX JOINT DEFLECTION (degrees)	WEIGHT (lbs.)
4"	PIRANHA - 0480	4.80	3.15	5	0.4 #
6"	PIRANHA - 0690	6.90	3.38	5	0.6 #
8"	PIRANHA - 0905	9.05	3.69	5	1.0 #
10"	PIRANHA - 1110	11.10	3.75	5	1.4 #
12"	PIRANHA - 1320	13.20	3.75	5	1.7 #

ROMAC Piranha is not recommended for above ground use.

Information contained in this document is subject to change. Contact Romac Industries for any updates.

\*TYTON® and TYTON JOINT® are registered trademarks of the United States Pipe and Foundry, LLC which has no affiliation with Romac Industries, Inc. United States Pipe and Foundry Company, LLC does not manufacture, or endorse the Piranha Gasket.