

Transmate

1 800 426 9341
21919 20th Avenue SE • Suite 100
Bothell, WA 98021
www.romac.com

5930™ Pipe Drilling Machine



Assembly for cutting pipe using drill bits:

1. Attach the service saddle to the pipe as instructed by the saddle manufacturer.
2. Thread the inlet of the corporation stop into the saddle.
3. Select the Drill Holder that matches the size of hole to be drilled in the pipe.
4. Thread the drill into the end of the Drill Holder.

Assembly for cutting PVC Pipe.

- 4a. Thread the PVC Adapter (354-04-3) into the end of the Drill Holder (354-12-06). Then thread the appropriate PVC Holesaw onto the PVC Adapter.
5. Slide the square end of the Drill Holder into the bottom end of the Machine. Push on the drill end of the Drill Holder until the square end protrudes through the gland nut and the drill and drill holder are housed inside the Body of the Machine. Next, grasp the square end of the Drill Holder that is sticking out through the gland nut and pull on it until it comes to a firm stop. Now the Drill Holder is retracted back as far as it can go. Take a wrench and tighten the gland nut. The gland nut will compress the gland packing and form a seal on the Drill Holder shank, so do not overtighten the gland nut.

Thank you for your purchase of the '5930' Drilling and Tapping Machine. Please read and understand this short operation manual. Our goal is to serve you, our customer. If you have any questions, complaints or improvement suggestions please call us at 1-800-426-9341



Drilling with the 5930

1. **Make sure the corporation stop is open.**
2. With the corporation stop open, push on the square end of the Drill Holder until the drill or Holesaw contacts the pipe. If the Drill Holder is hard to push, try loosening the gland nut to free up the drill holder.
3. Lightly tighten the gland nut to form a seal between the Machine Body and the Drill Holder.
4. Place the ratchet wrench provided onto the square end of the Drill Holder.
5. Rotate the feed screw and yoke around the Machine Body until the feed screw is in line with the drill holder.
6. Begin ratcheting the wrench in a clockwise direction as you face the pipe. For every two full rotations of the wrench, turn the feed screw about $\frac{1}{8}$ " of a turn.
7. If the ratchet wrench becomes difficult to turn, back off the feed screw a little and proceed. **DO NOT** reverse the ratchet wrench.
8. When the tap is completed, loosen the gland nut slightly, unscrew the feed screw and back the drill out of the corporation stop.
9. Close the corporation stop and remove the drilling machine.
10. Clean off any chips from the drill bit.
11. Wipe down the Machine before storing.

If you have questions, please contact Trasmate at 1.800.426.9341

Material Specifications


- Weighs approximately 20 lbs
- Compact and easy to handle
- 3/4" to 1" range of cuts using a corporation stop and saddle
- Cuts all types of water mains, wet and dry
- Easy to set up and use

3/4" to 1" range of cuts



To Order

1. Order Base Machine
2. Order Holesaws and Holesaw Adapters per desired cut size for PVC
3. Order Adapters per corp size and thread type
4. Order Drills per cut sizes
5. Order Drill Holders per drill sizes

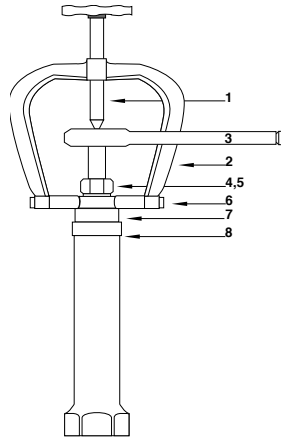

| REF NO. | DESCRIPTION | ITEM NO. |
|------------------|---------------------------------|------------|
| 1 | Feed Screw complete | 354-43 |
| 2 | Feed Yoke | 354-28 |
| 3 | Ratchet Wrench | 354-60-1 |
| 4 | Gland Nut | 354-39 |
| 5 | Gland Packing Seal (3 required) | 353-26-573 |
| 6 | Yoke Bolt (2 required) | 354-28-511 |
| 7 | Top Yoke | 354-28-1 |
| 8 | Body | 354-25 |
| Not illustrated: | | |
| | 6" Crescent Wrench (2 required) | 354-60-4 |
| | Tool Box | 352-61 |
| | Teclube Tapping Compound | 353-10-1 |

All items above are included with the 5930 Drilling Machine. Drill Holders, Drills, Holesaws, PVC Adapters, Cutter Adapters, Pilot Drills and Machine Adapters are ordered separately (see below).

| ITEM NUMBER | DESCRIPTION | |
|--|--|---|
| 354-00 | 5930 Drilling Machine | |
| | Included with 5930 Machine: | |
| 354-60-4 | Crescent Wrench (2) | |
| 354-60-1 | Ratchet Wrench | |
| 352-61 | Tool Box | |
| 353-10-1 | Tapping Compound | |
| Drills and Drill Holders | | |
| | individual Holder required for each size drill | |
| For Ductile, Cast Iron, A/C & Steel | 354-01-06 3/4" Drill: 5933 (actual OD 11/16") | |
| | 354-01-08 1" Drill: 5933 (actual OD 15/16") | |
| | 354-12-06 3/4" Drill Holder: 5934 | |
| | 354-12-08 1" Drill Holder: 5934 | |
| | PVC | |
| | For PVC only | 354-04-3 3/4" & 1" PVC Adapter: 9456 (includes 354-01-02) Required for PVC Holesaws |
| | | 354-12-06 3/4" Drill Holder |
| | | 351-01-206 3/4" PVC Holesaw (actual OD 11/16") |
| 351-01-208 1" PVC Holesaw (actual OD 7/8") | | |
| 354-01-02 3/16" Pilot Drill: 9445 | | |

| ITEM NUMBER | DESCRIPTION |
|--|---|
| Adapters | |
| 354-05-406 | 3/4" Female Iron Pipe Adapter: 5931-2 |
| 354-05-408 | 1" Female Iron Pipe Adapter: 5931-2 |
| 354-05-410 | 1 1/4" Female Iron Pipe Adapter: 5931-2 |
| 354-05-506 | 3/4" Flare Copper Adapter: 5931 |
| 354-05-508 | 1" Flare Copper Adapter: 5931 |
| 354-05-510 | 1 1/4" Flare Copper Adapter: 5931 |
| 354-05-606 | 3/4" Male Iron Pipe Adapter: 5932 |
| 354-05-608 | 1" Male Iron Pipe Adapter: 5932 |
| 354-05-610 | 1 1/4" Male Iron Pipe Adapter: 5932 |
| See Page TM-32 for ordering Special Fine Thread Adapters | |
| 354-05-706 | 3/4" Special Fine Thread Adapter |
| 354-05-708 | 1" Special Fine Thread Adapter |
| Special adapters can be made upon request | |
| For Corporation Stop Adapter Cross Reference List see pages 5 - 10 | |

A. Y. McDonald Corporation

| Corp | Outlet Size | 5930 |
|----------|-------------|-------------------------------|
| 3120 | 3/4" | 3/4" FIP Adapter 354-05-406 |
| 3120 | 1" | 1" FIP Adapter 354-05-408 |
| 3121 | 3/4" | 3/4" FIP Adapter 354-05-406 |
| 3121 | 1" | 1" FIP Adapter 354-05-408 |
| 3121 | 1 1/4" | 1 1/4" FIP Adapter 354-05-410 |
| 3121B | 1" | 1" FIP Adapter 354-05-408 |
| 3121B | 1 1/4" | 1 1/4" FIP Adapter 354-05-410 |
| 3122 | 3/4" | 3/4" FIP Adapter 354-05-406 |
| 3122 | 1" | 1" FIP Adapter 354-05-408 |
| 3122 | 1 1/4" | 1 1/4" FIP Adapter 354-05-410 |
| 3122B | 1" | 1" FIP Adapter 354-05-408 |
| 3122B | 1 1/4" | 1 1/4" FIP Adapter 354-05-410 |
| 3128 | 3/4" | 3/4" FIP Adapter 354-05-406 |
| 3128 | 1" | 1" FIP Adapter 354-05-408 |
| 3128 | 1 1/4" | 1 1/4" FIP Adapter 354-05-410 |
| 3128B | 3/4" | 3/4" FIP Adapter 354-05-406 |
| 3128B | 1" | 1" FIP Adapter 354-05-408 |
| 3131 | 3/4" | 3/4" FIP Adapter 354-05-406 |
| 3131 | 1" | 1" FIP Adapter 354-05-408 |
| 3131 | 1 1/4" | 1 1/4" FIP Adapter 354-05-410 |
| 3131B | 3/4" | 3/4" FIP Adapter 354-05-406 |
| 3131B | 1" | 1" FIP Adapter 354-05-408 |
| 3148B | 3/4" | 3/4" MIP Adapter 354-05-606 |
| 3148B | 1" | 1" MIP Adapter 354-05-608 |
| 3149B | 3/4" | 3/4" MIP Adapter 354-05-606 |
| 3149B | 1" | 1" MIP Adapter 354-05-608 |
| 3152 | 3/4" | 3/4" FIP Adapter 354-05-406 |
| 3152 | 1" | 1" FIP Adapter 354-05-408 |
| 4701-22 | 3/4" | 3/4" FC Adapter 354-05-506 |
| 4701-22 | 1" | 1" FC Adapter 354-05-508 |
| 4701-22 | 1 1/4" | 1 1/4" FC Adapter 354-05-510 |
| 4701-33 | 3/4" | 1" FC Adapter 354-05-508 |
| 4701-33 | 1" | 1 1/4" FC Adapter 354-05-510 |
| 4701-3Q | 3/4" | 3/4" FC Adapter 354-05-506 |
| 4701-3Q | 1" | 1" FC Adapter 354-05-508 |
| 4701-3T | 3/4" | 1" FC Adapter 354-05-508 |
| 4701-3T | 1" | 1 1/4" FC Adapter 354-05-510 |
| 4701-44 | 3/4" | 1" FC Adapter 354-05-508 |
| 4701-44 | 1" | 1 1/4" FC Adapter 354-05-510 |
| 4701-55 | 3/4" | 1" FC Adapter 354-05-508 |
| 4701-55 | 1" | 1 1/4" FC Adapter 354-05-510 |
| 4701B-3Q | 3/4" | 3/4" FC Adapter 354-05-506 |
| 4701B-3Q | 1" | 1" FC Adapter 354-05-508 |
| 4701B-3T | 3/4" | 1" FC Adapter 354-05-508 |
| 4701B-3T | 1" | 1 1/4" FC Adapter 354-05-510 |
| 4701B-22 | 3/4" | 3/4" FC Adapter 354-05-506 |
| 4701B-22 | 1" | 1" FC Adapter 354-05-508 |
| 4701B-22 | 1 1/4" | 1 1/4" FC Adapter 354-05-510 |
| 4701B-33 | 3/4" | 1" FC Adapter 354-05-508 |
| 4701B-33 | 1" | 1 1/4" FC Adapter 354-05-510 |
| 4701B-44 | 3/4" | 1" FC Adapter 354-05-508 |
| 4701B-44 | 1" | 1 1/4" FC Adapter 354-05-510 |
| 4701B-55 | 3/4" | 1" FC Adapter 354-05-508 |
| 4701B-55 | 1" | 1 1/4" FC Adapter 354-05-510 |

A. Y. McDonald Corporation

| Corp | Outlet Size | 5930 |
|-------------|-------------|------------------------------|
| 4101BCAP-22 | 3/4" | 3/4" FC Adapter 354-05-506 |
| 4101BCAP-22 | 1" | 1" FC Adapter 354-05-508 |
| 4101BCAP-33 | 3/4" | 1" FC Adapter 354-05-508 |
| 4101BCAP-33 | 1" | 1 1/4" FC Adapter 354-05-510 |
| 4101BCAP-3Q | 3/4" | 3/4" FC Adapter 354-05-506 |
| 4101BCAP-3Q | 1" | 1" FC Adapter 354-05-508 |
| 4101BCAP-44 | 3/4" | 1" FC Adapter 354-05-508 |
| 4101BCAP-44 | 1" | 1 1/4" FC Adapter 354-05-510 |
| 4101BCAPF | 3/4" | 3/4" MIP Adapter 354-05-606 |
| 4101BCAPF | 1" | 1" MIP Adapter 354-05-608 |
| 4101BCAPP | 3/4" | 3/4" FIP Adapter 354-05-406 |
| 4101BCAPP | 1" | 1" FIP Adapter 354-05-408 |
| 4101BCAPQ | 3/4" | 3/4" FC Adapter 354-05-506 |
| 4101BCAPQ | 1" | 1" FC Adapter 354-05-508 |
| 4101BCAPT | 3/4" | 3/4" FC Adapter 354-05-506 |
| 4101BCAPT | 1" | 1" FC Adapter 354-05-508 |
| 4101BP | 1" | 1" FIP Adapter 354-05-408 |
| 4701BQ | 3/4" | 3/4" FC Adapter 354-05-506 |
| 4701BQ | 1" | 1" FC Adapter 354-05-508 |
| 4701BQ | 1 1/4" | 1 1/4" FC Adapter 354-05-510 |
| 4701BT | 3/4" | 3/4" FC Adapter 354-05-506 |
| 4701BT | 1" | 1" FC Adapter 354-05-508 |
| 4701BT | 1 1/4" | 1 1/4" FC Adapter 354-05-510 |
| 4701Q | 3/4" | 3/4" FC Adapter 354-05-506 |
| 4701Q | 1" | 1" FC Adapter 354-05-508 |
| 4701Q | 1 1/4" | 1 1/4" FC Adapter 354-05-510 |
| 4701T | 3/4" | 3/4" FC Adapter 354-05-506 |
| 4701T | 1" | 1" FC Adapter 354-05-508 |
| 4701T | 1 1/4" | 1 1/4" FC Adapter 354-05-510 |

Rev 07-05-2010

A. Y. McDonald Corporation

| Corp | Outlet Size | 5930 |
|-------------|-------------|------------------------------|
| 4704-22 | 3/4" | 3/4" FC Adapter 354-05-506 |
| 4704-22 | 1" | 1" FC Adapter 354-05-508 |
| 4704-22 | 1 1/4" | 1 1/4" FC Adapter 354-05-510 |
| 4704-33 | 3/4" | 1" FC Adapter 354-05-508 |
| 4704-33 | 1" | 1 1/4" FC Adapter 354-05-510 |
| 4704-44 | 3/4" | 1" FC Adapter 354-05-508 |
| 4704-44 | 1" | 1 1/4" FC Adapter 354-05-510 |
| 4704-55 | 3/4" | 1" FC Adapter 354-05-508 |
| 4704-55 | 1" | 1 1/4" FC Adapter 354-05-510 |
| 4704-3Q | 3/4" | 3/4" FC Adapter 354-05-506 |
| 4704-3Q | 1" | 1" FC Adapter 354-05-508 |
| 4704-3T | 3/4" | 1" FC Adapter 354-05-508 |
| 4704-3T | 1" | 1 1/4" FC Adapter 354-05-510 |
| 4704B-22 | 3/4" | 3/4" FC Adapter 354-05-506 |
| 4704B-22 | 1" | 1" FC Adapter 354-05-508 |
| 4704B-22 | 1 1/4" | 1 1/4" FC Adapter 354-05-510 |
| 4704B-33 | 3/4" | 1" FC Adapter 354-05-508 |
| 4704B-33 | 1" | 1 1/4" FC Adapter 354-05-510 |
| 4704B-44 | 3/4" | 1" FC Adapter 354-05-508 |
| 4704B-44 | 1" | 1 1/4" FC Adapter 354-05-510 |
| 4704B-55 | 3/4" | 1" FC Adapter 354-05-508 |
| 4704B-55 | 1" | 1 1/4" FC Adapter 354-05-510 |
| 4704B-3Q | 3/4" | 3/4" FC Adapter 354-05-506 |
| 4704B-3Q | 1" | 1" FC Adapter 354-05-508 |
| 4704B-3T | 3/4" | 1" FC Adapter 354-05-508 |
| 4704B-3T | 1" | 1 1/4" FC Adapter 354-05-510 |
| 4104BCAP-22 | 3/4" | 3/4" FC Adapter 354-05-506 |
| 4104BCAP-22 | 1" | 1" FC Adapter 354-05-508 |
| 4104BCAP-33 | 3/4" | 1" FC Adapter 354-05-508 |
| 4104BCAP-33 | 1" | 1 1/4" FC Adapter 354-05-510 |
| 4104BCAP-3Q | 3/4" | 3/4" FC Adapter 354-05-506 |
| 4104BCAP-3Q | 1" | 1" FC Adapter 354-05-508 |
| 4104BCAP-44 | 3/4" | 1" FC Adapter 354-05-508 |
| 4104BCAP-44 | 1" | 1 1/4" FC Adapter 354-05-510 |
| 4104BCAPF | 3/4" | 3/4" MIP Adapter 354-05-606 |
| 4104BCAPF | 1" | 1" MIP Adapter 354-05-608 |
| 4104BCAPP | 3/4" | 3/4" FIP Adapter 354-05-406 |
| 4104BCAPP | 1" | 1" FIP Adapter 354-05-408 |
| 4704BQ | 3/4" | 3/4" FC Adapter 354-05-506 |
| 4704BQ | 1" | 1" FC Adapter 354-05-508 |
| 4704BT | 3/4" | 3/4" FC Adapter 354-05-506 |
| 4704BT | 1" | 1" FC Adapter 354-05-508 |
| 4704BT | 1 1/4" | 1 1/4" FC Adapter 354-05-510 |
| 4104BP | 1" | 1" FIP Adapter 354-05-408 |
| 4704Q | 3/4" | 3/4" FC Adapter 354-05-506 |
| 4704Q | 1" | 1" FC Adapter 354-05-508 |
| 4704Q | 1 1/4" | 1 1/4" FC Adapter 354-05-510 |
| 4704T | 3/4" | 3/4" FC Adapter 354-05-506 |
| 4704T | 1" | 1" FC Adapter 354-05-508 |
| 4704T | 1 1/4" | 1 1/4" FC Adapter 354-05-510 |

Rev 07-05-2010

Cambridge

| Corp | Outlet Size | 5930 |
|-----------|-------------|-------------------------------|
| 301-A3B3 | 3/4" | 3/4" FC Adapter 354-05-506 |
| 301-A3C3 | 3/4" | 3/4" FC Adapter 354-05-506 |
| 301-A3CE3 | 3/4" | 3/4" FC Adapter 354-05-506 |
| 301-A3F3 | 3/4" | 3/4" MIP Adapter 354-05-606 |
| 301-A3GJ3 | 3/4" | 3/4" FC Adapter 351-05-506 |
| 301-A3H3 | 3/4" | 3/4" FC Adapter 354-05-506 |
| 301-A3H4 | 1" | 1" FC Adapter 354-05-508 |
| 301-A3HE3 | 3/4" | 3/4" FC Adapter 354-05-506 |
| 301-A3J3 | 3/4" | 3/4" FC Adapter 354-05-506 |
| 301-A3K3 | 3/4" | 3/4" FC Adapter 354-05-506 |
| 301-A3PV3 | 3/4" | 3/4" FC Adapter 354-05-506 |
| 301-A3Z3 | 3/4" | 3/4" FC Adapter 354-05-506 |
| 301-A4B4 | 1" | 1" FC Adapter 354-05-508 |
| 301-A4C4 | 1" | 1" FC Adapter 354-05-508 |
| 301-A4CE4 | 1" | 1" FC Adapter 354-05-508 |
| 301-A4F4 | 1" | 1" MIP Adapter 354-05-608 |
| 301-A4GJ4 | 1" | 1" FC Adapter 351-05-508 |
| 301-A4HE4 | 1" | 1" FC Adapter 354-05-508 |
| 301-A4J4 | 1" | 1" FC Adapter 354-05-508 |
| 301-A4K4 | 1" | 1" FC Adapter 354-05-508 |
| 301-A4M4 | 1" | 1" FIP Adapter 354-05-408 |
| 301-A4PV4 | 1" | 1" FC Adapter 354-05-508 |
| 301-A4Z4 | 1" | 1" FC Adapter 354-05-508 |
| 301-A5C5 | 1 1/4" | 1 1/4" FC Adapter 354-05-510 |
| 301-A5F5 | 1 1/4" | 1 1/4" MIP Adapter 354-05-610 |
| 301-A5H5 | 1 1/4" | 1 1/4" FC Adapter 354-05-510 |
| 301-A5M5 | 1 1/4" | 1 1/4" FIP Adapter 354-05-410 |
| 301-M3B3 | 3/4" | 3/4" FC Adapter 354-05-506 |
| 301-M3C3 | 3/4" | 3/4" FC Adapter 354-05-506 |
| 301-M3F3 | 3/4" | 3/4" FIP Adapter 354-05-406 |
| 301-M3GJ3 | 3/4" | 3/4" FC Adapter 351-05-506 |
| 301-M3H3 | 3/4" | 3/4" FC Adapter 354-05-506 |
| 301-M3J3 | 3/4" | 3/4" FC Adapter 354-05-506 |
| 301-M3K3 | 3/4" | 3/4" FC Adapter 354-05-506 |
| 301-M3PV3 | 3/4" | 3/4" FC Adapter 354-05-506 |
| 301-M3Z3 | 3/4" | 3/4" FC Adapter 354-05-506 |
| 301-M4B4 | 1" | 1" FC Adapter 354-05-508 |
| 301-M4C4 | 1" | 1" FC Adapter 354-05-508 |
| 301-M4F4 | 1" | 1" MIP Adapter 354-05-608 |
| 301-M4GJ4 | 1" | 1" FC Adapter 351-05-508 |
| 301-M4H4 | 1" | 1" FC Adapter 354-05-508 |
| 301-M4J4 | 1" | 1" FC Adapter 354-05-508 |
| 301-M4K4 | 1" | 1" FC Adapter 354-05-508 |
| 301-M4M4 | 1" | 1" FIP Adapter 354-05-408 |
| 301-M4PV4 | 1" | 1" FC Adapter 354-05-508 |
| 301-M4Z4 | 1" | 1" FC Adapter 354-05-508 |
| 301-M5C5 | 1 1/4" | 1 1/4" FC Adapter 354-05-510 |
| 301-M5F5 | 1 1/4" | 1 1/4" MIP Adapter 354-05-610 |
| 301-M5H5 | 1 1/4" | 1 1/4" FC Adapter 354-05-510 |
| 301-M5M5 | 1 1/4" | 1 1/4" FIP Adapter 354-05-410 |

Rev 07-05-2010

Cambridge

| Corp | Outlet Size | 5930 |
|-----------|-------------|-----------------------------|
| 302-A3B3 | 3/4" | 3/4" FC Adapter 354-05-506 |
| 302-A3B4 | 1" | 1" FC Adapter 354-05-508 |
| 302-A3C3 | 3/4" | 3/4" FC Adapter 354-05-506 |
| 302-A3CE3 | 3/4" | 3/4" FC Adapter 354-05-506 |
| 302-A3F3 | 3/4" | 3/4" MIP Adapter 354-05-606 |
| 302-A3GJ3 | 3/4" | 3/4" FC Adapter 354-05-506 |
| 302-A3GJ4 | 1" | 1" FC Adapter 354-05-508 |
| 302-A3H3 | 3/4" | 3/4" FC Adapter 354-05-506 |
| 302-A3H3I | 3/4" | 3/4" FC Adapter 354-05-506 |
| 302-A3H4 | 1" | 1" FC Adapter 354-05-508 |
| 302-A3HE3 | 3/4" | 3/4" FC Adapter 354-05-506 |
| 302-A3J3 | 3/4" | 3/4" FC Adapter 354-05-506 |
| 302-A3J4 | 1" | 1" FC Adapter 354-05-508 |
| 302-A3K3 | 3/4" | 3/4" FC Adapter 354-05-506 |
| 302-A3M3 | 3/4" | 1" FIP Adapter 354-05-408 |
| 302-A3PV3 | 3/4" | 3/4" FC Adapter 354-05-506 |
| 302-A3PV4 | 1" | 1" FC Adapter 354-05-508 |
| 302-A3Z3 | 3/4" | 3/4" FC Adapter 354-05-506 |
| 302-A3Z4 | 1" | 1" FC Adapter 354-05-508 |
| 302-A4B4 | 1" | 1" FC Adapter 354-05-508 |
| 302-A4C4 | 1" | 1" FC Adapter 354-05-508 |
| 302-A4CE4 | 1" | 1" FC Adapter 354-05-508 |
| 302-A4F4 | 1" | 1" MIP Adapter 354-05-608 |
| 302-A4GJ4 | 1" | 1" FC Adapter 354-05-508 |
| 302-A4H4 | 1" | 1" FC Adapter 354-05-508 |
| 302-A4HAI | 1" | 1" FC Adapter 354-05-508 |
| 302-A4HE4 | 1" | 1" FC Adapter 354-05-508 |
| 302-A4J4 | 1" | 1" FC Adapter 354-05-508 |
| 302-A4K4 | 1" | 1" FC Adapter 354-05-508 |
| 302-A4M4 | 1" | 1" FIP Adapter 354-05-408 |
| 302-A4Z4 | 1" | 1" FC Adapter 354-05-508 |
| 302-M3B3 | 3/4" | 3/4" FC Adapter 354-05-506 |
| 302-M3B4 | 1" | 1" FC Adapter 354-05-508 |
| 302-M3GJ3 | 3/4" | 3/4" FC Adapter 354-05-506 |
| 302-M3GJ4 | 1" | 1" FC Adapter 354-05-508 |
| 302-M3H3 | 3/4" | 3/4" MIP Adapter 354-05-606 |
| 302-M3H4 | 1" | 1" MIP Adapter 354-05-608 |
| 302-M4B4 | 1" | 1" FC Adapter 354-05-508 |
| 302-M4GJ4 | 1" | 1" FC Adapter 354-05-508 |
| 302-M4H4 | 1" | 1" MIP Adapter 354-05-608 |

Rev 07-05-2010

Cambridge

| Corp | Outlet Size | 5930 |
|-----------|-------------|-------------------------------|
| 311-A3B3 | 3/4" | 3/4" FC Adapter 354-05-506 |
| 311-A3C3 | 3/4" | 3/4" FC Adapter 354-05-506 |
| 311-A3F3 | 3/4" | 3/4" MIP Adapter 354-05-606 |
| 311-A3H3 | 3/4" | 3/4" FC Adapter 354-05-506 |
| 311-A3J3 | 3/4" | 3/4" FC Adapter 354-05-506 |
| 311-A3PV3 | 3/4" | 3/4" FC Adapter 354-05-506 |
| 311-A3Z3 | 3/4" | 3/4" FC Adapter 354-05-506 |
| 311-A4B4 | 1" | 1" FC Adapter 354-05-508 |
| 311-A4C4 | 1" | 1" FC Adapter 354-05-508 |
| 311-A4F4 | 1" | 1" MIP Adapter 354-05-608 |
| 311-A4H4 | 1" | 1" FC Adapter 354-05-508 |
| 311-A4J4 | 1" | 1" FC Adapter 354-05-508 |
| 311-A4M4 | 1" | 1" FIP Adapter 354-05-408 |
| 311-A4PV4 | 1" | 1" FC Adapter 354-05-508 |
| 311-A4Z4 | 1" | 1" FC Adapter 354-05-508 |
| 311-A5C5 | 1 1/4" | 1 1/4" FC Adapter 354-05-510 |
| 311-A5F5 | 1 1/4" | 1 1/4" MIP Adapter 354-05-610 |
| 311-A5H5 | 1 1/4" | 1 1/4" FC Adapter 354-05-510 |
| 311-A5M5 | 1 1/4" | 1 1/4" FIP Adapter 354-05-410 |
| 311-M3B3 | 3/4" | 3/4" FC Adapter 354-05-506 |
| 311-M3C3 | 3/4" | 3/4" FC Adapter 354-05-506 |
| 311-M3F3 | 3/4" | 3/4" MIP Adapter 354-05-606 |
| 311-M3H3 | 3/4" | 3/4" FC Adapter 354-05-506 |
| 311-M3J3 | 3/4" | 3/4" FC Adapter 354-05-506 |
| 311-M3PV3 | 3/4" | 3/4" FC Adapter 354-05-506 |
| 311-M3Z3 | 3/4" | 3/4" FC Adapter 354-05-506 |
| 311-M4B4 | 1" | 1" FC Adapter 354-05-508 |
| 311-M4C4 | 1" | 1" FC Adapter 354-05-508 |
| 311-M4F4 | 1" | 1" MIP Adapter 354-05-608 |
| 311-M4H4 | 1" | 1" FC Adapter 354-05-508 |
| 311-M4J4 | 1" | 1" FC Adapter 354-05-508 |
| 311-M4M4 | 1" | 1" FIP Adapter 354-05-408 |
| 311-M4PV4 | 1" | 1" FC Adapter 354-05-508 |
| 311-M4Z4 | 1" | 1" FC Adapter 354-05-508 |
| 311-M5C5 | 1 1/4" | 1 1/4" FC Adapter 354-05-510 |
| 311-M5F5 | 1 1/4" | 1 1/4" MIP Adapter 354-05-610 |
| 311-M5H5 | 1 1/4" | 1 1/4" FC Adapter 354-05-510 |
| 311-M5M5 | 1 1/4" | 1 1/4" FIP Adapter 354-05-410 |

Rev 07-05-2010

Ford

| Corp | Outlet Size | 5930 |
|-----------|-------------|--|
| F400-13 | 3/4" | 3/4" FIP Adapter 354-05-406 |
| F400-3 | 3/4" | 3/4" FIP Adapter 354-05-406 |
| F400-34 | 1" | 1" FIP Adapter 354-05-408 |
| F400-4 | 1" | 1" FIP Adapter 354-05-408 |
| F500-1 | 3/4" | 3/4" FIP Adapter 354-05-406 |
| F500-13 | 3/4" | 3/4" FIP Adapter 354-05-406 |
| F500-3 | 3/4" | 3/4" FIP Adapter 354-05-406 |
| F500-4 | 1" | 1" FIP Adapter 354-05-408 |
| F600-23 | 3/4" | 3/4" FC Adapter 354-05-506 |
| F600-3 | 3/4" | 3/4" FC Adapter 354-05-506 |
| F600-34 | 1" | 1" FC Adapter 354-05-508 |
| F600-4 | 1" | 1" FC Adapter 354-05-508 |
| F600-45 | 1 1/4" | 1 1/4" FC Adapter 354-05-510 |
| F700-3 | 3/4" | 3/4" FC Adapter 354-05-506 |
| F700-34 | 1" | 1" FC Adapter 354-05-508 |
| F700-4 | 1" | 1" FC Adapter 354-05-508 |
| F700-45 | 1 1/4" | 1 1/4" FC Adapter 354-05-510 |
| F800-1 | 3/4" | 3/4" FIP Adapter 354-05-406 |
| F800-2 | 3/4" | 3/4" FIP Adapter 354-05-406 |
| F800-3 | 1" | 1" FIP Adapter 354-05-408 |
| F800-4 | 1 1/4" | 1 1/4" FIP Adapter 354-05-410 |
| F900-1 | 3/4" | 3/4" FIP Adapter 354-05-406 |
| F900-3 | 3/4" | 3/4" FC Adapter 354-05-506 |
| F900-4 | 1 1/4" | 1 1/4" FIP Adapter 354-05-410 |
| F1000-23 | 3/4" | 3/4" FC Adapter 354-05-506 |
| F1000-3 | 3/4" | 3/4" FC Adapter 354-05-506 |
| F1000-34 | 1" | 1" FC Adapter 354-05-508 |
| F1000-3-Q | 3/4" | 3/4" FC Adapter 354-05-506 |
| F1000-4 | 1" | 1" FC Adapter 354-05-508 |
| F1000-45 | 1 1/4" | 1 1/4" FC Adapter 354-05-510 |
| F1000-4-Q | 1" | 1" FC Adapter 354-05-508 |
| F1001-3 | 1" | 1" FC Adapter 354-05-508 |
| F1001-34 | 1 1/4" | 1 1/4" FC Adapter 354-05-510 |
| F1001-3-Q | 3/4" | 3/4" 110 Compression Connection 354-05-706 |
| F1001-4 | 1 1/4" | 1 1/4" FC Adapter 354-05-510 |
| F1001-4-Q | 1" | 1" 110 Compression Connection 354-05-708 |
| F1002-3 | 1" | 1" FC Adapter 354-05-508 |
| F1002-34 | 1 1/4" | 1 1/4" FC Adapter 354-05-510 |
| F1002-4 | 1 1/4" | 1 1/4" FC Adapter 354-05-510 |
| F1100-3 | 3/4" | 3/4" FC Adapter 354-05-506 |
| F1100-34 | 1" | 1" FC Adapter 354-05-508 |
| F1100-3-Q | 3/4" | 3/4" 110 Compression Connection 354-05-706 |
| F1100-4 | 1" | 1" FC Adapter 354-05-508 |
| F1100-45 | 1 1/4" | 1 1/4" FC Adapter 354-05-510 |
| F1100-4-Q | 1 1/4" | 1" 110 Compression Connection 354-05-708 |
| F1101-3 | 1" | 1" FC Adapter 354-05-508 |
| F1101-34 | 1 1/4" | 1 1/4" FC Adapter 354-05-510 |
| F1101-3-Q | 3/4" | 3/4" 110 Compression Connection 354-05-706 |
| F1101-4 | 1 1/4" | 1 1/4" FC Adapter 354-05-510 |
| F1102-3 | 1" | 1" FC Adapter 354-05-508 |
| F1102-4 | 1 1/4" | 1 1/4" FC Adapter 354-05-510 |
| F1600-3 | 3/4" | 3/4" MIP Adapter 354-05-606 |
| F1600-4 | 1" | 1" MIP Adapter 354-05-608 |
| F1700-3 | 3/4" | 3/4" MIP Adapter 354-05-606 |
| F1700-4 | 1" | 1" MIP Adapter 354-05-608 |

Ford

| Corp | Outlet Size | 5930 |
|------------|-------------|--|
| FB400-3 | 3/4" | 3/4" FIP Adapter 354-05-406 |
| FB400-4 | 1" | 1" FIP Adapter 354-05-408 |
| FB400-5 | 1 1/4" | 1 1/4" FIP Adapter 354-05-410 |
| FB500-3 | 3/4" | 3/4" FIP Adapter 354-05-406 |
| FB500-4 | 1" | 1" FIP Adapter 354-05-408 |
| FB500-5 | 1 1/4" | 1 1/4" FIP Adapter 354-05-410 |
| FB600-3 | 3/4" | 3/4" FC Adapter 354-05-506 |
| FB600-34 | 1" | 1" FC Adapter 354-05-508 |
| FB600-4 | 1" | 1" FC Adapter 354-05-508 |
| FB600-5 | 1 1/4" | 1 1/4" FC Adapter 354-05-510 |
| FB700-3 | 3/4" | 3/4" FC Adapter 354-05-506 |
| FB700-34 | 1" | 1" FC Adapter 354-05-508 |
| FB700-4 | 1" | 1" FC Adapter 354-05-508 |
| FB700-5 | 1 1/4" | 1 1/4" FC Adapter 354-05-510 |
| FB800-3 | 1" | 1" FIP Adapter 354-05-408 |
| FB800-4 | 1 1/4" | 1 1/4" FIP Adapter 354-05-410 |
| FB900-3 | 1" | 1" FIP Adapter 354-05-408 |
| FB900-4 | 1 1/4" | 1 1/4" FIP Adapter 354-05-410 |
| FB1000-3 | 3/4" | 3/4" FC Adapter 354-05-506 |
| FB1000-34 | 1" | 1" FC Adapter 354-05-508 |
| FB1000-3-Q | 3/4" | 3/4" FC Adapter 354-05-506 |
| FB1000-4 | 1" | 1" FC Adapter 354-05-508 |
| FB1000-45 | 1 1/4" | 1 1/4" FC Adapter 354-05-510 |
| FB1000-4-Q | 1" | 1" FC Adapter 354-05-508 |
| FB1000-5 | 1 1/4" | 1 1/4" FC Adapter 354-05-510 |
| FB1001-3 | 1 | 1" FC Adapter 354-05-508 |
| FB1001-3-Q | 3/4" | 3/4" 110 Compression Connection 354-05-706 |
| FB1001-4 | 1" | 1" FC Adapter 354-05-508 |
| FB1001-4-Q | 1" | 1" 110 Compression Connection 354-05-708 |
| FB1001-5 | 1 1/4" | 1 1/4" FC Adapter 354-05-510 |
| FB1002-3 | 1" | 1" FC Adapter 354-05-508 |
| FB1002-4 | 1 1/4" | 1 1/4" FC Adapter 354-05-510 |
| FB1100-3 | 3/4" | 3/4" FC Adapter 354-05-506 |
| FB1100-34 | 1" | 1" FC Adapter 354-05-508 |
| FB1100-3-Q | 3/4" | 3/4" FC Adapter 354-05-506 |
| FB1100-4 | 1" | 1" FC Adapter 354-05-508 |
| FB1100-45 | 1 1/4" | 1 1/4" FC Adapter 354-05-510 |
| FB1100-4-Q | 1" | 1" FC Adapter 354-05-508 |
| FB1100-5 | 1 1/4" | 1 1/4" FC Adapter 354-05-510 |
| FB1101-3 | 1" | 1" FC Adapter 354-05-508 |
| FB1101-3-Q | 3/4" | 3/4" 110 Compression Connection 354-05-706 |
| FB1101-4 | 1 1/4" | 1 1/4" FC Adapter 354-05-510 |
| FB1102-4 | 1" | 1" FC Adapter 354-05-508 |
| FB1102-4 | 1 1/4" | 1 1/4" FC Adapter 354-05-510 |
| FB1600-3 | 3/4" | 3/4" MIP Adapter 354-05-606 |
| FB1600-4 | 1" | 1" MIP Adapter 354-05-608 |
| FB1600-5 | 1 1/4" | 1 1/4" MIP Adapter 354-05-610 |
| FB1700-3 | 3/4" | 3/4" MIP Adapter 354-05-606 |
| FB1700-4 | 1" | 1" MIP Adapter 354-05-608 |
| FB1700-5 | 1 1/4" | 1 1/4" MIP Adapter 354-05-610 |

Rev 07-05-2010

Jones

| Corp | Outlet Size | 5930 |
|--------|-------------|-------------------------------|
| J-41 | 3/4" | 3/4" MIP Adapter 354-05-606 |
| J-41 | 1" | 1" MIP Adapter 354-05-608 |
| J-41 | 1 1/4" | 1 1/4" MIP Adapter 354-05-610 |
| J-45 | 3/4" | 3/4" MIP Adapter 354-05-606 |
| J-45 | 1" | 1" MIP Adapter 354-05-608 |
| J-50 | 3/4" | 3/4" FIP Adapter 354-05-406 |
| J-50 | 1" | 1" FIP Adapter 354-05-408 |
| J-51 | 3/4" | 3/4" FIP Adapter 354-05-406 |
| J-51 | 1" | 1" FIP Adapter 354-05-408 |
| J-89 | 3/4" | 3/4" FIP Adapter 354-05-406 |
| J-89 | 1" | 1" FIP Adapter 354-05-408 |
| J-89 | 1 1/4" | 1 1/4" FIP Adapter 354-05-410 |
| J-1500 | 3/4" | 3/4" FC Adapter 354-05-506 |
| J-1500 | 1" | 1" FC Adapter 354-05-508 |
| J-1505 | 3/4" | 3/4" FC Adapter 354-05-506 |
| J-1505 | 1" | 1" FC Adapter 354-05-508 |
| J-1929 | 3/4" | 3/4" FC Adapter 354-05-506 |
| J-1929 | 1" | 1" FC Adapter 354-05-508 |
| J-1930 | 3/4" | 3/4" FC Adapter 354-05-506 |
| J-1930 | 1" | 1" FC Adapter 354-05-508 |
| J-1931 | 3/4" | 3/4" FIP Adapter 354-05-406 |
| J-1931 | 1" | 1" FIP Adapter 354-05-408 |
| J-1932 | 3/4" | 3/4" FIP Adapter 354-05-406 |
| J-1932 | 1" | 1" FIP Adapter 354-05-408 |
| J-1935 | 3/4" | 3/4" FC Adapter 354-05-506 |
| J-1935 | 1" | 1" FC Adapter 354-05-508 |
| J-1936 | 3/4" | 3/4" MIP Adapter 354-05-606 |
| J-1936 | 1" | 1" MIP Adapter 354-05-608 |
| J-1937 | 3/4" | 3/4" FC Adapter 354-05-506 |
| J-1937 | 1" | 1" FC Adapter 354-05-508 |
| J-1943 | 3/4" | 3/4" MIP Adapter 354-05-606 |
| J-1943 | 1" | 1" MIP Adapter 354-05-608 |
| J-1944 | 3/4" | 3/4" MIP Adapter 354-05-606 |
| J-1944 | 1" | 1" MIP Adapter 354-05-608 |
| J-1993 | 1" | 1" MIP Adapter 354-05-608 |
| J-3401 | 3/4" | 3/4" FC Adapter 354-05-506 |
| J-3401 | 1" | 1" FC Adapter 354-05-508 |
| J-3402 | 3/4" | 3/4" FC Adapter 354-05-506 |
| J-3402 | 1" | 1" FC Adapter 354-05-508 |
| J-3403 | 3/4" | 3/4" FC Adapter 354-05-506 |
| J-3403 | 1" | 1" FC Adapter 354-05-508 |
| J-3404 | 3/4" | 3/4" FC Adapter 354-05-506 |
| J-3404 | 1" | 1" FC Adapter 354-05-508 |

Rev 07-05-2010

Mueller

| Corp | Outlet Size | 5930 |
|---------|-------------|--|
| B-2996 | 3/4" | 3/4" FIP Adapter 354-05-406 |
| B-2996 | 1" | 1" FIP Adapter 354-05-408 |
| B-20003 | 3/4" | 3/4" FIP Adapter 354-05-406 |
| B-20003 | 1" | 1" FIP Adapter 354-05-408 |
| B-20013 | 3/4" | 3/4" FIP Adapter 354-05-406 |
| B-20013 | 1" | 1" FIP Adapter 354-05-408 |
| B-20045 | 3/4" | 3/4" FIP Adapter 354-05-406 |
| B-20045 | 1" | 1" FIP Adapter 354-05-408 |
| B-20046 | 3/4" | 3/4" FIP Adapter 354-05-406 |
| B-20046 | 1" | 1" FIP Adapter 354-05-408 |
| B-25000 | 3/4" | 3/4" FC Adapter 354-05-506 |
| B-25000 | 1" | 1" FC Adapter 354-05-508 |
| B-25005 | 3/4" | 3/4" FC Adapter 354-05-506 |
| B-25005 | 1" | 1" FC Adapter 354-05-508 |
| B-25006 | 3/4" | 3/4" FC Adapter 354-05-506 |
| B-25006 | 1" | 1" FC Adapter 354-05-508 |
| B-25008 | 3/4" | 3/4" FC Adapter 354-05-506 |
| B-25008 | 1" | 1" FC Adapter 354-05-508 |
| B-25009 | 3/4" | 3/4" 110 Compression Connection 354-05-706 |
| B-25009 | 1" | 1" 110 Compression Connection 354-05-708 |
| B-25020 | 3/4" | 3/4" FC Adapter 354-05-506 |
| B-25020 | 1" | 1" FC Adapter 354-05-508 |
| B-25024 | 3/4" | 3/4" FC Adapter 354-05-506 |
| B-25024 | 1" | 1" FC Adapter 354-05-508 |
| B-25025 | 3/4" | 3/4" FC Adapter 354-05-506 |
| B-25025 | 1" | 1" FC Adapter 354-05-508 |
| B-25026 | 3/4" | 3/4" FC Adapter 354-05-506 |
| B-25026 | 1" | 1" FC Adapter 354-05-508 |
| B-25028 | 3/4" | 3/4" FC Adapter 354-05-506 |
| B-25028 | 1" | 1" FC Adapter 354-05-508 |
| B-25029 | 3/4" | 3/4" 110 Compression Connection 354-05-706 |
| B-25029 | 1" | 1" 110 Compression Connection 354-05-708 |

| | | |
|---------|------|----------------------------|
| E-25009 | 3/4" | 3/4" FC Adapter 354-05-506 |
| E-25009 | 1" | 1" FC Adapter 354-05-508 |
| E-25029 | 3/4" | 3/4" FC Adapter 354-05-506 |
| E-25029 | 1" | 1" FC Adapter 354-05-508 |

| | | |
|---------|--------|-----------------------------------|
| H-9971 | 3/4" | 3/4" FC Adapter 354-05-506 |
| H-9971 | 1" | Special thread - call for pricing |
| H-9976 | 3/4" | 3/4" FC Adapter 354-05-506 |
| H-9976 | 1" | Special thread - call for pricing |
| H-9979 | 5/8" | 3/4" FIP Adapter 354-05-406 |
| H-9979 | 3/4" | 1" FIP Adapter 354-05-408 |
| H-9979 | 1" | 1 1/4" FIP Adapter 354-05-410 |
| H-9991 | 1" | Special thread - call for pricing |
| H-9992 | 1 1/4" | 1 1/4" FIP Adapter 354-05-410 |
| H-9995 | 1" | Special thread - call for pricing |
| H-9996 | 3/4" | 3/4" FIP Adapter 354-05-406 |
| H-9996 | 1" | 1" FIP Adapter 354-05-408 |
| H-10003 | 5/8" | 3/4" FIP Adapter 354-05-406 |
| H-10003 | 3/4" | 1" FIP Adapter 354-05-408 |
| H-10003 | 1" | 1 1/4" FIP Adapter 354-05-410 |
| H-10012 | 3/4" | 3/4" FIP Adapter 354-05-406 |
| H-10012 | 1" | 1" FIP Adapter 354-05-408 |

Mueller

| Corp | Outlet Size | 5930 |
|---------|-------------|--|
| H-10013 | 3/4" | 3/4" FIP Adapter 354-05-406 |
| H-10013 | 1" | 1" FIP Adapter 354-05-408 |
| H-10013 | 1 1/4" | 1 1/4" FIP Adapter 354-05-410 |
| H-10045 | 3/4" | 3/4" MIP Adapter 354-05-606 |
| H-10045 | 1" | 1" MIP Adapter 354-05-608 |
| H-10046 | 3/4" | 3/4" MIP Adapter 354-05-606 |
| H-10046 | 1" | 1" MIP Adapter 354-05-608 |
| H-15000 | 3/4" | 3/4" FC Adapter 354-05-506 |
| H-15000 | 1" | 1" FC Adapter 354-05-508 |
| H-15000 | 1 1/4" | 1 1/4" FC Adapter 354-05-510 |
| H-15002 | 3/4" | 1" FC Adapter 354-05-508 |
| H-15002 | 1" | 1 1/4" FC Adapter 354-05-510 |
| H-15005 | 3/4" | 3/4" FC Adapter 354-05-506 |
| H-15005 | 1" | 1" FC Adapter 354-05-508 |
| H-15006 | 3/4" | 3/4" FC Adapter 354-05-506 |
| H-15006 | 1" | 1" FC Adapter 354-05-508 |
| H-15008 | 3/4" | 3/4" FC Adapter 354-05-506 |
| H-15008 | 1" | 1" FC Adapter 354-05-508 |
| H-15009 | 3/4" | 3/4" 110 Compression Connection 354-05-706 |
| H-15009 | 1" | 1" 110 Compression Connection 354-05-708 |
| H-15010 | 3/4" | 3/4" FC Adapter 354-05-506 |
| H-15010 | 1" | 1" FC Adapter 354-05-508 |
| H-15020 | 3/4" | 3/4" FC Adapter 354-05-506 |
| H-15020 | 1" | 1" FC Adapter 354-05-508 |
| H-15024 | 3/4" | 3/4" FC Adapter 354-05-506 |
| H-15024 | 1" | 1" FC Adapter 354-05-508 |
| H-15025 | 3/4" | 3/4" FC Adapter 354-05-506 |
| H-15025 | 1" | 1" FC Adapter 354-05-508 |
| H-15025 | 1 1/4" | 1 1/4" FC Adapter 354-05-510 |
| H-15026 | 3/4" | 3/4" FC Adapter 354-05-506 |
| H-15026 | 1" | 1" FC Adapter 354-05-508 |
| H-15028 | 3/4" | 3/4" FC Adapter 354-05-506 |
| H-15028 | 1" | 1" FC Adapter 354-05-508 |
| H-15029 | 3/4" | 3/4" 110 Compression Connection 354-05-706 |
| H-15029 | 1" | 1" 110 Compression Connection 354-05-708 |
| H-15030 | 3/4" | 3/4" FC Adapter 354-05-506 |
| H-15030 | 1" | 1" FC Adapter 354-05-508 |
| H-15031 | 3/4" | 3/4" FC Adapter 354-05-506 |
| H-15031 | 1" | 1" FC Adapter 354-05-508 |
| H-15035 | 3/4" | 3/4" FC Adapter 354-05-506 |
| H-15035 | 1" | 1" FC Adapter 354-05-508 |
| H-15045 | 3/4" | 3/4" FC Adapter 354-05-506 |
| H-15045 | 1" | 1" FC Adapter 354-05-508 |

| | | |
|---------|------|----------------------------|
| P-15008 | 3/4" | 3/4" FC Adapter 354-05-506 |
| P-15008 | 1" | 1" FC Adapter 354-05-508 |
| P-15028 | 3/4" | 3/4" FC Adapter 354-05-506 |
| P-15028 | 1" | 1" FC Adapter 354-05-508 |
| P-25008 | 3/4" | 3/4" FC Adapter 354-05-506 |
| P-25008 | 1" | 1" FC Adapter 354-05-508 |
| P-25028 | 3/4" | 3/4" FC Adapter 354-05-506 |
| P-25028 | 1" | 1" FC Adapter 354-05-508 |

| | | |
|---------|----|--------------------------|
| V-25056 | 1" | 1" FC Adapter 354-05-508 |
| V-25058 | 1" | 1" FC Adapter 354-05-508 |

Red Hed

| Corp | Outlet Size | 5930 |
|----------|-------------|------------------------------|
| RH 43801 | 3/4" | 3/4" FC Adapter 354-05-506 |
| RH 43802 | 1" | 1" FC Adapter 354-05-508 |
| RH 43803 | 1 1/4" | 1 1/4" FC Adapter 354-05-510 |
| RH 43811 | 3/4" | 3/4" FC Adapter 354-05-506 |
| RH 43812 | 1" | 1" FC Adapter 354-05-508 |
| RH 43813 | 1 1/4" | 1 1/4" FC Adapter 354-05-510 |
| RH 43821 | 3/4" | 3/4" FC Adapter 354-05-506 |
| RH 43822 | 1" | 1" FC Adapter 354-05-508 |
| RH 43823 | 1 1/4" | 1 1/4" FC Adapter 354-05-510 |
| RH 43831 | 3/4" | 3/4" FC Adapter 354-05-506 |
| RH 43832 | 1" | 1" FC Adapter 354-05-508 |
| RH 43833 | 1 1/4" | 1 1/4" FC Adapter 354-05-510 |
| RH 43841 | 3/4" | 3/4" FIP Adapter 354-05-406 |
| RH 43842 | 1" | 1" FIP Adapter 354-05-408 |
| RH 43851 | 3/4" | 3/4" FIP Adapter 354-05-406 |
| RH 43852 | 1" | 1" FIP Adapter 354-05-408 |

| | | |
|-----------|--------|-------------------------------|
| RHB 43853 | 1 1/4" | 1 1/4" FIP Adapter 354-05-410 |
| RHB 43873 | 1 1/4" | 1 1/4" MIP Adapter 354-05-610 |
| RHB 43953 | 1 1/4" | 1 1/4" FIP Adapter 354-05-410 |
| RHB 43973 | 1 1/4" | 1 1/4" MIP Adapter 354-05-610 |

| | | |
|------------|------|----------------------------|
| RHSB 43821 | 3/4" | 3/4" FC Adapter 354-05-506 |
| RHSB 43822 | 1" | 1" FC Adapter 354-05-508 |

Rev 07-05-2010